

# CS-5500 SERIES L3 GIGABITS DUAL STACK

## INTELLIGENT SWITCH DATASHEET

# CS-5500 SERIES

CS-5500-28T



CS-5500-52T



CS-5500-10C



© 2014 3ISYS NETWORKS INC ALL RIGHTS RESERVED. THIS DOCUMENT IS 3ISYS PUBLIC INFORMATION ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT FURTHER NOTICE. ALL FEATURES WITH \* MARK WILL BE AVAILABLE BY FIRMWARE UPGRADE.

## PRODUCT OVERVIEW

CS-5500 Series switch is L3 Gigabits intelligent security switch for the access layer and aggregation layer of enterprise, datacenter, MAN and carrier networks. It supports comprehensive QoS, enhanced VLAN functions (Vlan VPN, Voice VLAN Flexible QinQ, etc), classified bandwidth control, multilink aggregation, intelligent security control, static route, which fulfill the network requirements for Gigabits to desktop, server farm connection, MAN security access, and so on.

The CS-5500 series GE intelligent switch has multiple types including CS-5500-24F, CS-5500-28T, CS-5500-52T, CS-5500-28T-POE. The product is designed for ipv4 and ipv6 dual stack network. With the abundant ipv6 features and full Gigabits rate, the product can still work for next generation network.

## MAIN FEATURES

---

### High adaptability VLAN Features

- CS-5500 series support 802.1q and port based VLAN, as well as MAC based VLAN. When user move from one port to another, system can still record it as the same user through identified MAC and then keep the same VLAN for the user.
- CS-5500 series has unique Stacking VLAN technology, supporting up to 16 million VLAN, thus can provide one VLAN to each user. The advantages are: most small broadcast domain, with high efficiency; separate data between users on L2 with high security; unique VLAN for each user to identify the user; and VLAN for each user improves the management and operation level.
- CS-5500 series Vlan VPN (QinQ) technique provide low cost, easy operation, manageable L2 VPN function, and differentiate data packets by its service and area to support more and more business.
- Voice Vlan function enables to add IP Phone to voice VLAN to ensure effective QoS.

### HIGH RELIABILITY

- CS-5500 series support large number as 2~4 combo Gigabit uplink ports, which could be designed in various ring protection applications, effectively raised the expansibility and performance of network
- CS-5500 series support VCT & DDM(Digital Diagnostic Monitoring), help to locate the error places in the link, make it fast to solve relative problems for network management
- CS-5500 series support STP, RSTP, MSTP based on 802.1D, 802.1W, 802.1S, to avoid loop link and configure abundant backup link in network. 802.3ad port aggregation supported, to add link bandwidth and abundant connection between equipments
- With Lightning Protection supported, CS-5500series could ensure the network stability in physical aspect.

### ENHANCED SECURITY

- IEEE 802.1X port-based access control ensures all users are authorized before being granted access to the network. User authentication is carried out using any standard-based RADIUS server.
- One thousand large numbers of Access Control Lists (ACLs) can be used to restrict access to sensitive network resources by denying packets and forward by different policies.
- The CS-5500 series support DHCP snooping, which prevents DHCP attacks and illegal DHCP SERVER by setting trust ports and untrust ports. With DHCP Snooping binding and option82 enabled, it can combine modules like dot1x and ARP, or implement user-access-control independently
- The CS-5500 product support much more L2 security

features such as ARP guard, Anti-ARP scanning, and other ARP and MAC security technology to protect network security and reliability.

### Comprehensive QoS

- CS-5500 series switch can classify stream by port, 802.1p, TOS, DSCP, TCP/UDP ports and assign different level of service, supports DWRR/SWRR/WRR/SP to provide QOS for voice/data/video.
- With QinQ, Selective QinQ, Flexible QinQ supported, CS-5500series can also differentiate data packets effectively by its service, vlan and area

### ABUNDANT MULTICAST FEATURES

- CS-5500 series also support MVR (Multicast VLAN Register), selectively allows traffic to cross between different VLANs for bandwidth and security reasons. With MVR Trunk function, which could associate multicast Vlan to trunk port, CS-5500series combine the Vlan data into the same link, saving lots of resources for users.
- The CS-5500 series could prevent multicast traffic from flooding through IGMP Snooping, while multicast traffic is forwarded to ports associated to multicast devices only

### POE+ support

- The CS-5500-28T-POE can support POE (Power Over Ethernet) technical and connect to wireless AP, IP phone and Network Camera. The network can help administrators to easily deploy cable.
- With both 802.3af and 802.3at support, the CS-5500-28T-POE can support 24 port POE at same time and the MAX power of each port up to 15.4W or 12 ports up to 30W . The product can define the power of each port to save the power and set port priority for each port.

### Simple management

- CS-5500 supports Simple Network Management Protocol (SNMP), in-band and out-of-band. Supports Command Line Interface (CLI) and WEB, supports Security IP function to prevent illegal users log in or change the configuration.
- As an important feature of carrier network, OAM can help the user to monitor and manage the network across different protocols and equipments.
- CS-5500 supports Secure Shell (SSH), which will ensure the security of switch management and configuration.
- CS-5500 can be managed by general network management platform with 3rd management software.

### Abundant IPv6 Support

- The CS-5500 series switch supports IPv6 in hardware for maximum performance. As more network devices growing and the need for larger addressing and higher security become critical, the CS-5500 series switch will be a right product to meet the requirement.
- The CS-5500 series switch also supports DHCPv6, based on IPv6, including DHCPv6 server, client, relay and snooping, etc.

### Integrated authentication and billing solution

- CS-5500 support 3ISYS enhanced 802.1x authentication and billing solution, and authentication by port and MAC address. Working with 802.1x client, it can bill by time/flow, and strict bundle for account,

password, IP, MAC, VLAN, port, and switches. It support anti spam, internet time control. With user based dynamic VLAN and bandwidth authorization, it can allocate IP address based on group policy without DHCP server.

## SPECIFICATIONS

Item	CS-5500-10C	CS-5500-28T	CS-5500-28T-POE	CS-5500-52T	CS-5500-28X	CS-5500-24F
Ports	8x10/100/1000 Base-T	24x10/100/1000 Base-T	24x10/100/1000 Base-T POE	48x10/100/1000 Base-T	24x10/100/1000 Base-T + with 4 x 10 GBE SFP+	20 x 100/1000 Base-X (SFP) + 4 x GbE Combo (RJ45/SFP) + 4 x 10GbE SFP+
	with 2x1000M/ Gigabits Combo (SFP/GT)	with 4x1000 M SFP	with 4 x 1000 M SFP	with 4 x 1000 M SFP		


PERFORMANCE						
Switching Capacity	20Gbps	56Gbps	56Gbps	104Gbps	128Gbps	128Gbps
Forwarding Rate	15Mpps	42Mpps	42Mpps	78Mpps	96Mpps	96Mpps
MAC ADDRESS	16K	16K	16K	16K	16K	16K
ACL TABLE	1K	1K	1K	1K	1K	1K
Queues per port	8	8	8	8	8	8
VLAN TABLE	4k	4k	4k	4k	4k	4k
Dimension(W×H×D)	330x44x204mm	440x44x230mm	440x44x410mm	442x44x220mm	443x44x230mm	443x44x230mm
Power Supply	Input AC: 100V ~240 V	Input AC: 100V~240 V	Input AC: 100V~240 V	InputAC:100V~240V	InputAC:100V~240V	InputAC:100V~240V
Power Consumption	24W	30W	400W	40W	30W	50W
MTBF	>80,000 hours					
Temperature	Working 0°C~50°C, storage -40°C~70°C					
Relative Humidity	5%~95%-non-condensing					
EMC safety	FCC, CE, RoHS,					
Physical protection	Lightning Protection Level: 10/700 4KV					

Main Features				
Forwarding		Storage and forwarding		
L2, L3 Features	VLAN Type	802.1Q based Vlan and support upto 4K vlan id		
		Support QinQ, selective QinQ, Flexibe QinQ		
		Support Voice VLAN		
		Port based VLAN		
		MAC based VLAN		
		IP subnet VLAN		
		Protocol based VLAN		
		Private VLAN		
		Support GVRP		
	Spanning Tree	802.1D STP, 802.1W RSTP, 802.1S MSTP		
		Support Root guard, BPDU guard, BPDU forwarding		
	Link Aggregation	Support LACP 802.3ad, max 128 groups trunk with max 8 ports for each trunk,		
		Support src-mac/dst-mac/src-dst-mac/src-ip/dst-ip/src-dst-ip based load balance		
	MAC Operation	Support MAC binding		
		Support black hole MAC		
		Support MAC limit per port		
	Broadcast storm control	Support Broadcast / Multicast / Unicast Storm Control		
		Supports control and can set rate for broadcast		
	Port	Support VCT & DDM		
		Support UDLD, LLDP, LLDP-MED		
		Support RSPAN, ERSPAN		
		Support 1:1 and N:1 port mirror		
		Jumbo Frame		
		Loopback interface		
		Port loop detection		
		Bandwidth control: At least 64Kbps step		
Support HOL preventing first packet jam, semi-duplex backpres - sure, duplex IEEE802.3x				
GE combo ports could be compatible with FE SFP module				
Port Protection				
POE+	NA	NA	Support IEEE 802.3af POE	NA
			Support IEEE 802.3at POE+ (30W)	
			Support global / port POE function control	
L3	Support 8 static routes and route summarization			

QOS Features		8 queues per port
		Support QinQ, Selective QinQ, Flexible QinQ
		Traffic classification based on IEEE 802.1p CoS, IP Precedence, DSCP, TCP/UDP port number, Access Control List
		Supports SP, WRR, SWRR, DWRR for scheduling
		Support flow shaping
Security	IEEE 802.1x	Port, MAC based authentication
		Support guest vlan and auto vlan
	AAA	RADIUS for Ipv4 and Ipv6
		TACACS+ for Ipv4
	ACL	Support 1K Access Control Lists(ACL) based on source/destination IP address, source/destination MAC address, IP type, TCP/UDP port number, IP precedence, time range, ToS.
		ACL on VLAN interface
		Flow redirect based on ACL
	Enhanced	Monitor ping Sweep, and anti-illegal multicast, controlled traffic
		Ip source guard
Prevent illegal multicast source and limited multicast		
Multicast		Support IGMP v1/v2/v3 snooping
		Support Multicast Vlan Register (MVR) based on port
		Support Multicast receive control
		Support illegal multicast source detect
		Support multicast policy configuration
IPv6		ICMPv6, NDP, SNMP over IPv6, HTTP over Ipv6, Ipv6 Ping/tracer, Ipv6 Telnet, Ipv6 RADIUS+, Ipv6 Syslog, IPv6 SNMP, IPv6 FTP/TFTP
		Support DHCPv6 Server, Relay, Snooping
		Support MLD Snooping
		Support IPv6 MVR
Management	Switch Management	CLI, WEB, Telnet, SNMPv1/v2c/v3 through IPv4 and IPv6
		RMON 1,2,3,9
		SSHv1,v2 & SSL support
		RJ45 Console
		Support Public & Private MIB interface
		Supports SNTP/NTP, Summer Saving Time
		Support Multiple sys-log servers
		Support OAM 802.3ah
		Support NMS software management
		Support MAX 24 unites cluster
		Supports IPv4 and IPv6 Security IP management
	Firmware & Configuration	Multiple firmware images/ configuration files
		Firmware upgrade via TFTP/FTP server
		Configuration file upload/download via TFTP/FTP server
	DHCP	Supports BOOTP, DHCP server/client for IP address assignment
		Support DHCP relay, DHCP relay option 82, DHCP Snooping, and DHCP Snooping option 82

Ordering information	
Product	Description
CS-5500-10C-G	1000M copper switch, 8*10/100/1000M ports + 2 gigabits combo(SFP/GT)
CS-5500-52T-G	1000M copper switch, 48*10/100/1000M ports + 4 gigabits SFP
CS-5500-28T-G	1000M copper switch, 24*10/100/1000M ports + 4 gigabits SFP
CS-5500-28T-P	1000M copper switch, 24*10/100/1000M POE ports + 4 gigabits SFP
CS-5500-28X	1000M copper switch, 24*10/100/1000M ports + 4 10Gbps SFP+
CS-5500-24F	20 x 100/1000Base-X (SFP) + 4 x GbE Combo(RJ45/SFP) + 4 x 10GbE SFP+

## C5-5500 Series application

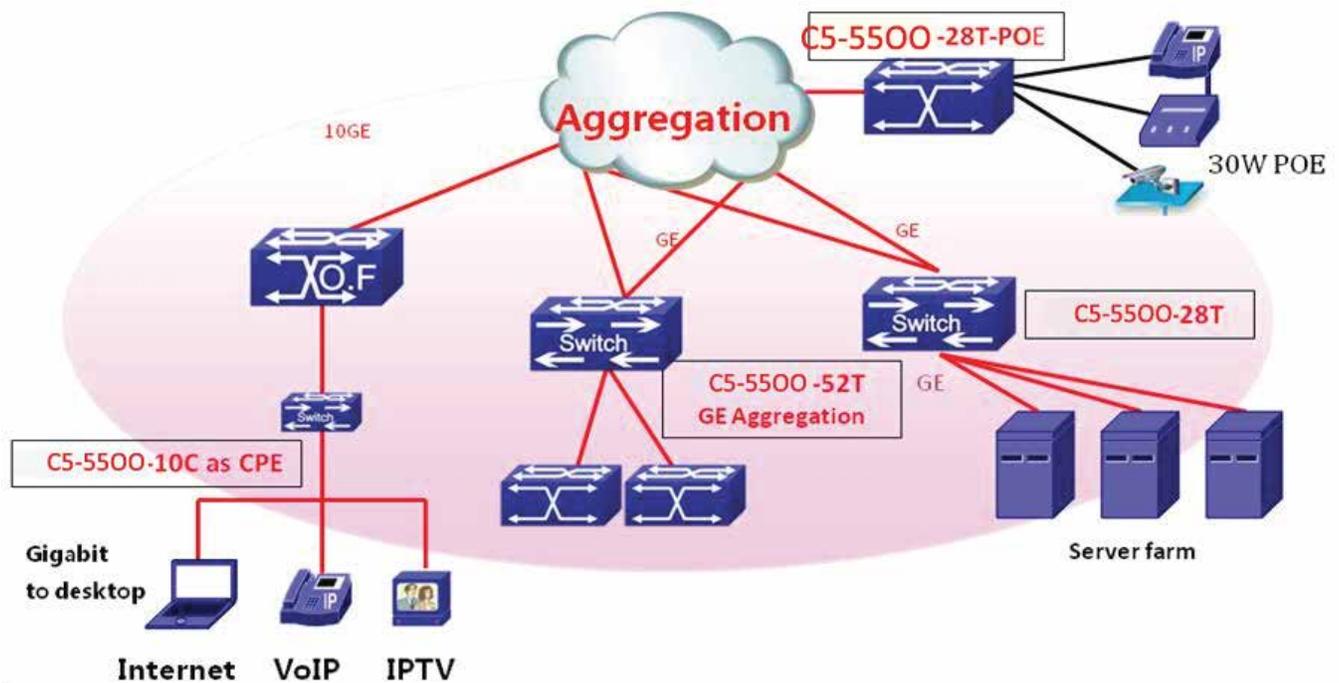



#### CONTACT DETAILS

#F-2, No. 12, Alley 112  
Lane 12 Wen Hu Street Taipei, Taiwan  
Ph: +886920221793

Office 508, The Fairmont  
Shiekh Zayed Road, UAE  
Ph: +97143116732

P.O. Box 74, P.C 102 CB 49  
Al-Khuwair-233, Muscat  
Ph: +96824488412

[www.3isysnetworks.com](http://www.3isysnetworks.com)

[Click to Read More](#)

© 2012 3ISYS Networks Inc All rights reserved. This document is 3ISYS Networks Public Information

All specifications are subject to change without further notice. All features with \* mark will be available by firmware upgrade.