


3ISYS-API-2C-WG/2C1P-WG

INDUSTRIAL IEEE 802.11 A/B/G/N WIRELESS ACCESS POINT
WITH 2X10/100BASE-T(X)

FEATURES

- High Speed Air Connectivity: WLAN interface support up to 300 Mbps link speed
- Highly Security Capability: WEP/WPA/WPA-PSK(TKIP,AES)/WPA2/WPA2-PSK(TKIP,AES)/802.1X Authentication supported
- Support X-Roaming < 100 ms
- Support wireless load balance
- Support AP/Client/Bridge/AP-Client Mode
- Switch Mode Supported: Daisy Chain support to reduce usage of switch ports
- Dual redundant Ethernet port support redundant mode (Recovery time < 10ms)
- Secured Management by HTTPs
- Wireless connecting status monitoring
- Event Warning by Syslog, Email, SNMP Trap, Relay and Beeper
- 1KV isolation for PoE P.D. port of 3ISYS-API-2C1P-WG
- Rigid IP-30 housing design
- DIN-Rail and Wall-mount enabled






© 2014 3ISYS NETWORKS INC ALL RIGHTS RESERVED. THIS DOCUMENT IS 3ISYS PUBLIC INFORMATION ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT FURTHER NOTICE. ALL FEATURES WITH * MARK WILL BE AVAILABLE BY FIRMWARE UPGRADE.

PRODUCT OVERVIEW

3ISYS-API-2C-WG/API-2C1P-WG series are reliable 802.11 a/b/g/n WLAN Access Point with 2 ports LAN. It supports 802.1X and MAC filters for security control. It can be configured to operate in AP/Bridge/Repeater/AP-Client mode. You are able to configure 3ISYS-API-2C-WG/API-2C1P-WG series by WEB interface via LAN port or WLAN interface. 3ISYS-API-2C-WG/API-2C1P-WG series provide dual Ethernet ports in switch mode, so that you can use Daisy Chain to reduce the usage of Ethernet switch ports. In addition, 3ISYS-API-2X-WG also provides P.D. feature on ETH2 which is fully compliant with IEEE802.3af PoE P.D. specification. Therefore, 3ISYS-API-2C-WG/API-2C1P-WG series are one of the best communication solutions for wireless applications on the industrial network.


PRACTICAL OPERATION

In practical operation of wireless access point, Windows utility (System-Vision) is supported. This utility is very helpful for you to search and configure IP of access point on the industrial network. In addition, the wireless access point support various kinds of operation modes include AP/ Bridge/Repeater/AP-Client mode. 3ISYS-API-2C-WG/API-2C1P-WG series also support PoE P.D. feature to extend the layout up to 100 meters. You can build up the wireless network easily.

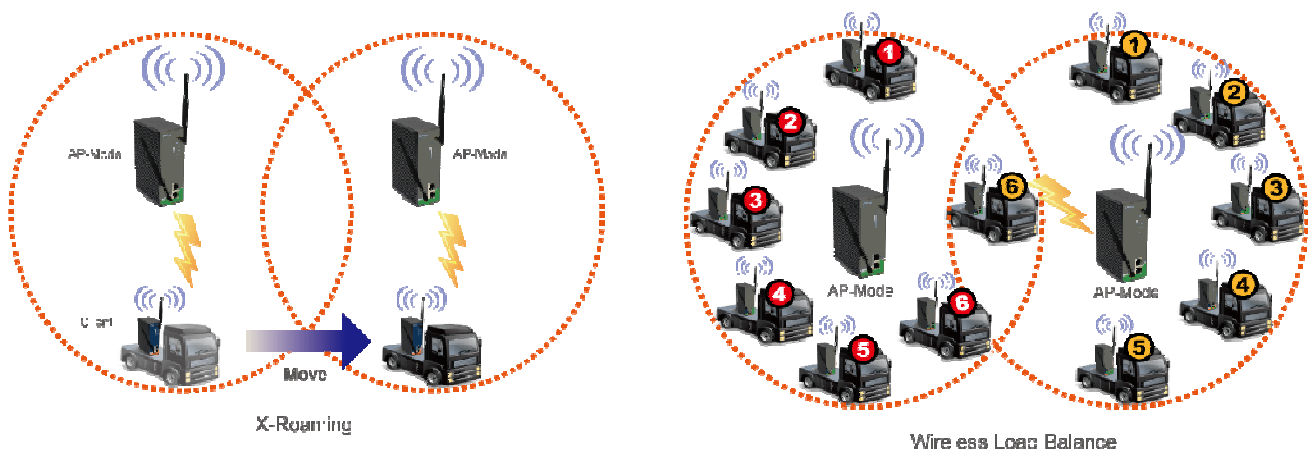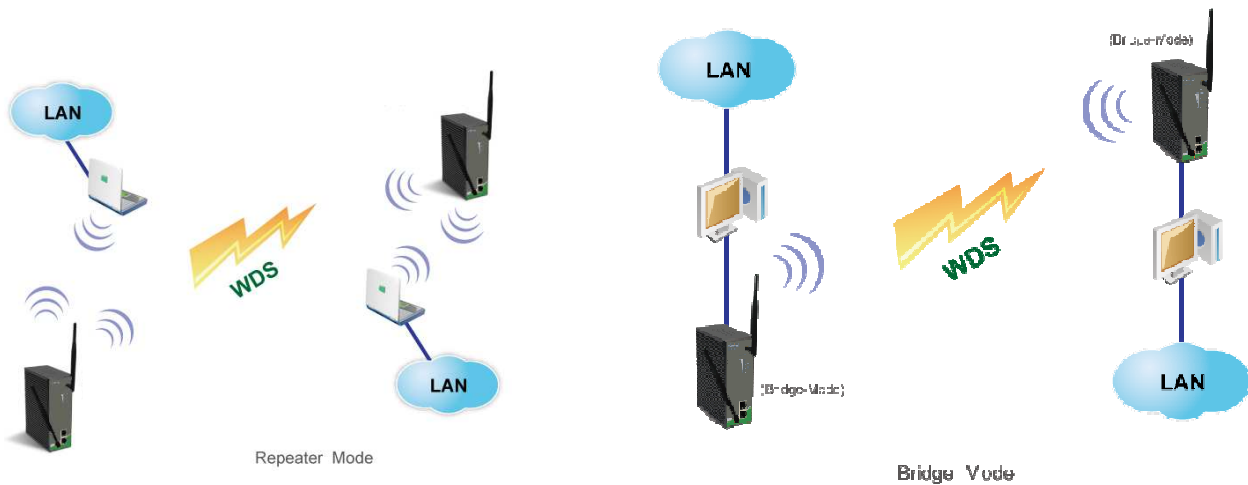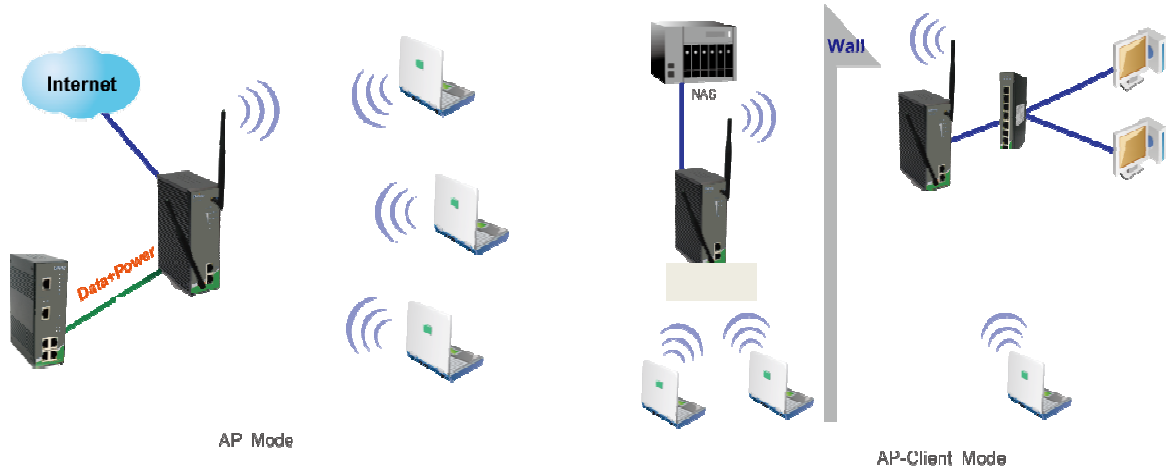

Various kinds of operation modes

Dimension

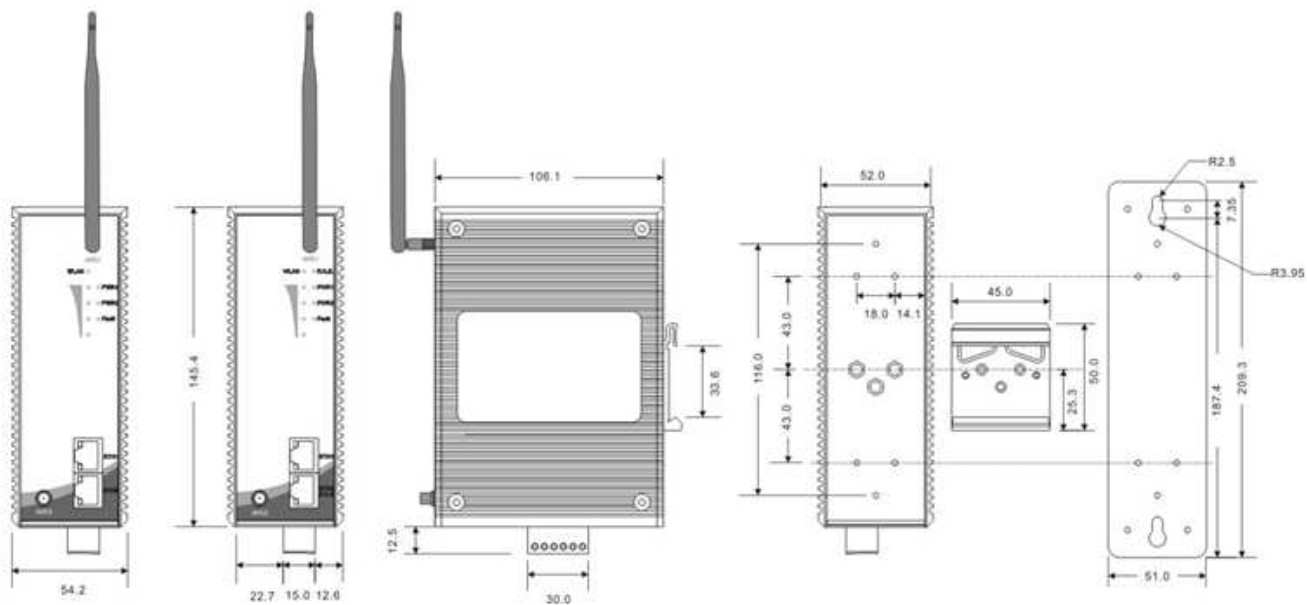

Specification

3ISYS WLAN Access Point Model	3ISYS-API-2C-WG	3ISYS-API-2C1P-WG
Physical Ports		
10/100 Base-T(X) Ports in RJ45 Auto MDI/MDIX	2	
PoE P.D. port	-	Present at ETH2 Fully compliant with IEEE 802.3af Power Device specification Over load & short circuit protection Isolation Voltage: 1000 VDC min. Isolation Resistance : 10 ⁸ ohms min
WLAN interface		
Operating Mode	AP/Bridge/Client/AP-Client	
Antenna Connector	2 x External reverse SMA-type antenna connector	
Radio Frequency Type	DSSS, OFDM	
Modulation	IEEE802.11a/n: OFDM with BPSK, QPSK, 16QAM, 64QAM IEEE802.11b: CCK, DQPSK, DBPSK IEEE802.11g/n: OFDM with BPSK, QPSK, 16QAM, 64QAM	
Frequency Band	America / FCC: 2.412~2.462 GHz (11 channels) 5.180~5.240 GHz & 5.745~5.825 GHz (9 channels) Europe CE / ETSI: 2.412~2.472 GHz (13 channels) 5.180~5.240 GHz (4 channels) Japan(JP): 2.412~2.484 GHz (13 channels) 5.180~5.240 GHz (4 channels) Canada(CA): 2.412~2.462 GHz (11 channels) 5.180~5.825 GHz (21 channels)	
Transmission Rate	802.11b: 1/2/5.5/11 Mbps 802.11a/g: 6/9/12/18/24/36/48/54 Mbps 802.11n(40MHz): UP to 300 Mbps	
Transmit Power	802.11a: 13dBm ±1.5dBm 802.11b: 16dBm ±1.5dBm 802.11g: 14dBm ±1.5dBm 802.11n(2.4G@20MHz): 13dBm ±1.5dBm 802.11n(2.4G@40MHz): 12dBm ±1.5dBm 802.11n(5G@20MHz): 12dBm ±1.5dBm 802.11n(5G@40MHz): 12dBm ±1.5dBm	
Receiver Sensitivity	802.11a: -68dBm ±2dBm@54Mbps 802.11b: -82dBm ±2dBm@11Mbps 802.11g: -68dBm ±2dBm@54Mbps 802.11n(2.4G@20MHz,MCS15): -64dBm ±2dBm 802.11n(2.4G@40MHz,MCS15): -60dBm ±2dBm 802.11n(5G@20MHz,MCS15): -64dBm ±2dBm 802.11n(5G@40MHz,MCS15): -60dBm ±2dBm	

Encryption Security	WEP: (64-bit, 128-bit key supported) WPA/WPA2:802.11i (WEP and AES encryption) WPA-PSK (256-bit key pre-shared key supported) 802.1X Authentication supported TKIP encryption	
Wireless Security	SSID broadcast disable and enable	
Protocol Support		
Protocol	ARP,BOOTP, DHCP, DNS, HTTP, IP, ICMP, SNTP, TCP, UDP, 802.1X, SNMP, STP	
LED indicators		
Power indicator	PWR 1(2)(PoE) / Ready: Red On: Power is on and booting up. Green On: Power is on and functioning Normally.	
10/100Base-T(X) RJ45 port indicator	Green for port Link/Act at 100Mbps. Amber for port Link/Act at 10Mbps.	
WLAN LEDs	WLAN Link /ACT: Green: Link, Orange: Poor signal Green for WLAN Strength: 1<25%, 2<50%, 3<75%, 4<100%	
Fault	Red: Ethernet link down or power down	
Fault contact		
Relay	Relay output to carry capacity of 1A at 24VDC	
Power		
Redundant Input power	Dual DC inputs. 12~48VDC on 6-pin terminal block	
Power consumption (Typ.)	6 Watts	
Overload current protection	Present	
Reverse polarity protection	Present	
Physical Characteristic		
Enclosure	IP-30	
Dimension (W x D x H)	54.1(W)x106.1(D)x145.4(H) mm (2.13x4.18x5.72 inch.)	
Weight (g)	800 g	804 g
Environmental		
Storage Temperature	-40 to 85°C (-40 to 185°F)	
Operating Temperature	-10 to 60°C (14 to 140°F)	
Operating Humidity	5% to 95% Non-condensing	
Regulatory approvals		
EMI	FCC Part 15, CISPR (EN55022) class A	
EMS	EN61000-4-2 (ESD), EN61000-4-3 (RS), EN61000-4-4 (EFT), EN61000-4-5 (Surge), EN61000-4-6 (CS), EN61000-4-8, EN61000-4-11	
Shock	IEC60068-2-27	
Free Fall	IEC60068-2-32	
Vibration	IEC60068-2-6	
Safety	EN60950-1	
MTBF (Hours) (MIL-HDBK-217F2, GB, GC, 25°C)	352,982	352,594
Warranty	1year	

Ordering Information

3ISYS-AAA-C-P-WG



Module Identifier	Wireless protocols	Number of 10/100 Base-T(X) Ports	Number of 10/100Base-T(X) Ports, PoE
Industrial Access point, API	- 1 : 802.11 b/g - 2 : 802.11 a - 3 : 802.11 a/b/g - 4 : 802.11 b/g/n - 5 : 802.11 a/n - 6 : 802.11 a/b/g/n	2	1

Accessories Included

⌘ 3ISYS-API-2C-WG/API-2C1P-WG x 1	⌘ CD x 1	⌘ Quick Installation Guide x 1
	⌘ Din-Rail Kit x 1	⌘ Wall-Mount Kit x 1

Optional Accessories

⌘ 3ISYS-PWR-45 series : 45 Watts power supply	⌘ 3ISYS-PWR-75 series : 75 Watts power supply
⌘ 3ISYS-PWR-120 series : 120 Watts power supply	⌘ WLAN RF Antenna (Omni-directional) series
⌘ RF Antenna Base (Magnetic) series	⌘ RF Cable series
⌘ RF Surge Protector	



CONTACT DETAILS

#F-2, No. 12, Alley 112
Lane 12 Wen Hu Street Taipei, Taiwan
Ph: +886920221793

Office 508, The Fairmont
Shiekh Zayed Road, UAE
Ph: +97143116732

P.O. Box 74, P.C 102 CB 49
Al-Khuwair-233, Muscat
Ph: +96824488412

www.3isysnetworks.com

[Click to Read More](#)

© 2012 3ISYS Networks Inc All rights reserved. This document is 3ISYS Networks Public Information

All specifications are subject to change without further notice. All features with * mark will be available by firmware upgrade.